


# XQY-PS2-6/18-SE

## 精密高频功分/合路器

precision RF power splitter/Combiner

SN	Parameters	Specifications
1	频率范围 Frequency Range	6000 ~ 18000 MHz
2	插入损耗 Insertion Loss	≤ 0.8 dB (Excluding theoretical loss 未含理论损耗 3.0dB)
3	输入驻波 Input Port VSWR	Typ.1.18 / Max.1.4
4	输出驻波 Output Port VSWR	Typ.1.15 / Max.1.3
5	隔离度 Isolation	Typ.24dB / Min.18dB
6	幅度平衡 Amplitude Balance	±0.3dB
7	相位平衡 Phase Balance	±3°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	SMA-Female
10	承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 1W
11	工作温度 Operation Temperature	-45°C ~ +85°C
12	表面处理 Surface Finishing	Black paint 黑色烤漆
13	外形尺寸 Outline Dimensions	30*24*10 (mm)
14	重量 Weight	22 (g)

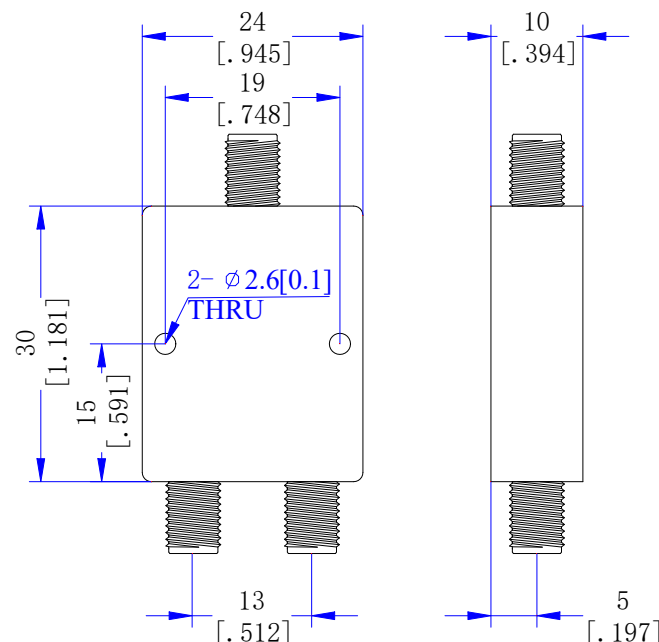

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)